



HORSTMANN



CYLINDER & ROOM THERMOSTATS

CYLINDER THERMOSTAT Model HCT 2

Adjustable temperature range 0°C - 90°C

16 Amp changeover (S.P.D.T.) contacts

Switching differential of approximately 3°C

Bimetallic sensor system

ROOM THERMOSTAT Model HRT 2

Adjustable temperature range 5°C - 35°C

10 Amp (S.P.S.T) contacts

Ventilated enclosure

Bimetallic sensor system with
accelerator resistor



Horstmann.
We're in control.

Energy Efficiency
recommends this product only when installed
according to Government Good Practice
Guide 302.

**Horstmann.
We're in control.**




CYLINDER THERMOSTAT Model HCT 2

With an adjustable temperature range of between 0°C - 90°C, the Horstmann cylinder thermostat is suitable for mounting on either domestic hot water cylinders or large heating pipes.

A bimetallic sensor system ensures precise hot water temperature control. Each unit is supplied with a strap and buckle, for easy installation.

Dimensions Shown in mm

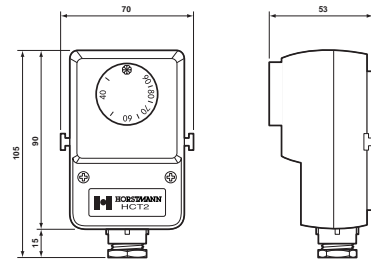

SPECIFICATION

CYLINDER THERMOSTAT TYPE HCT 2

OPERATING VOLTAGE
220/240V 50/60Hz
SWITCH CURRENT AT 250V AC
16 Amps Maximum
CONTACT CONFIGURATION
SPDT
TEMPERATURE RANGE
0°C - 90°C
SWITCHING DIFFERENTIAL
Approx. 3°C
SENSOR SYSTEM
Bimetallic
ENCLOSURE PROTECTION
IP 40




ROOM THERMOSTAT Model HRT 2

Good looking and reliable, the Horstmann room thermostat is suitable for all central heating systems which respond to an electrical on/off signal.

A bimetallic sensor ensures excellent response to temperature changes and a simple rotating dial allows setting between 5°C - 35°C.

Units can be mounted directly onto the wall using the built-in patress.

Dimensions Shown in mm

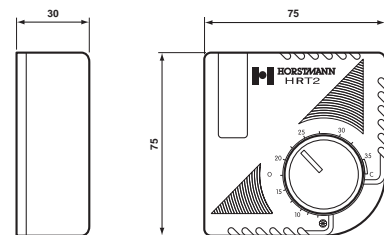

ROOM THERMOSTAT TYPE HRT 2

CONTACT CONFIGURATION
SPST
TEMPERATURE RANGE
5°C - 35°C
SWITCHING CURRENT AT 250V AC
10 Amps maximum
SWITCHING DIFFERENTIAL
Approx. 0.5°C
SENSOR SYSTEM
Bimetallic
ENCLOSURE PROTECTION
IP 30

Both the Horstmann room thermostat and cylinder thermostat are fully compatible with Horstmann's motorised valves and central heating programmers.



HORSTMANN

Horstmann Controls Limited South Bristol Business Park Roman Farm Road Bristol BS4 1UP
Tel 0117 978 8700 Fax 0117 978 8701 E-mail sales@horstmann.co.uk www.horstmann.co.uk



BS 5750
Part 1
ISO 9001
Q5646